

CPM

Series Centrifugal Pump

Operating Conditions

- Liquid temperature up to 60°C
- Ambient temperature up to 40°C
- Total suction lift up to 9m

Pump

- Pump Body: Cast Iron
- Impeller: Brass
- Mechanical Seal: Carbon / Ceramic / Stainless Steel
- Front Cover: Cast Iron

Motor

- Single Phase
- Heavy Duty Continuous Work
- Motor Housing: Aluminium
- Shaft: Carbon Steel / Stainless steel
- Insulation: Class B
- Protection: IP44
- Cooling: External Ventilation




CPM Series pump

CPM Series pump with PS-01 controller

CPM

Series Centrifugal Pump

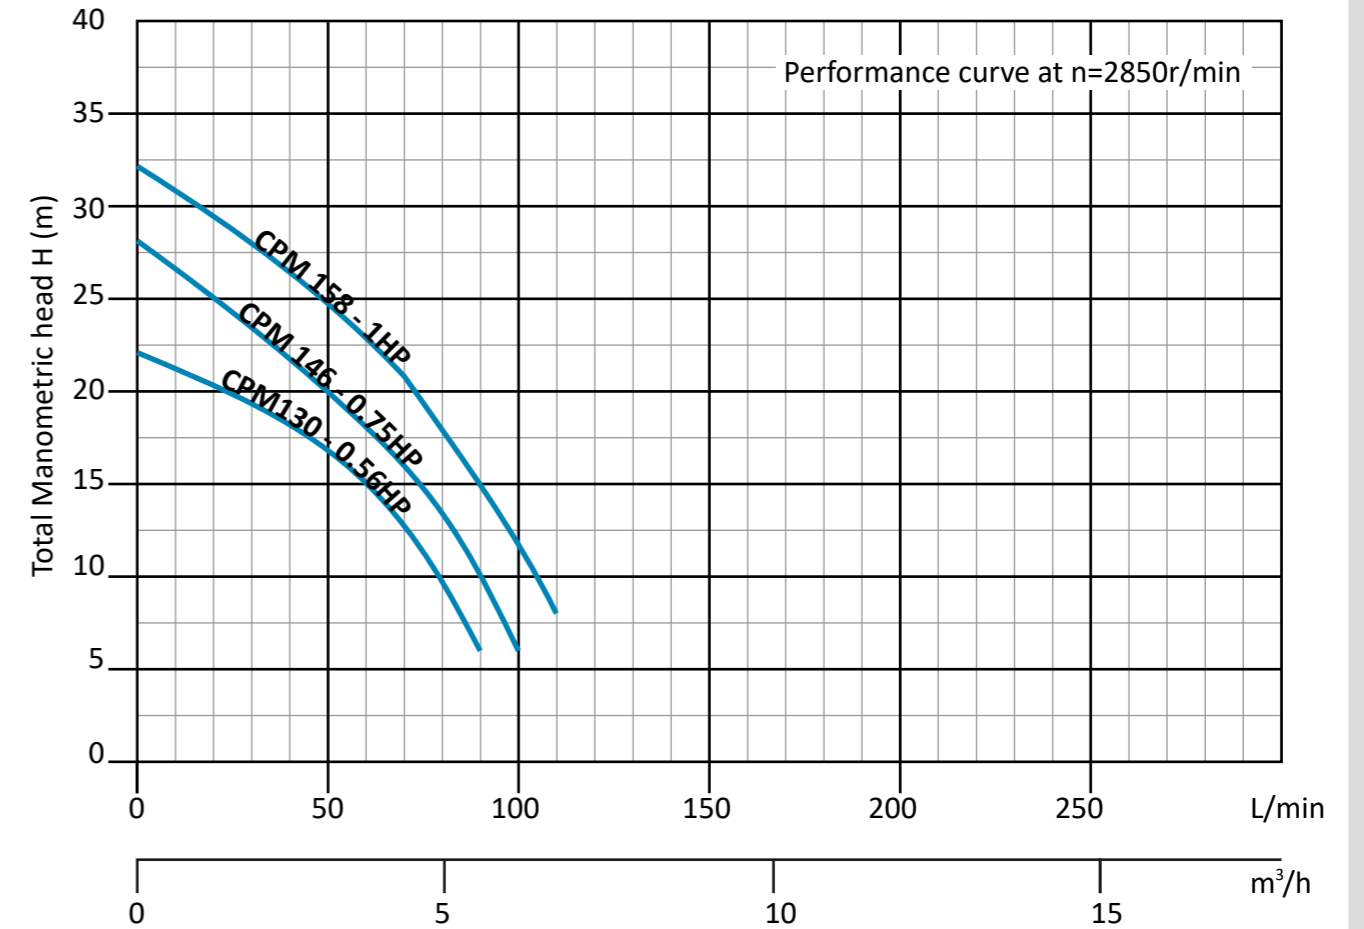

Technical Data (220~240V/50HZ)

Model	Single-phase Motor				n=2850r/min			DNA	DNM
	Input max kW	Output Power kW	HP	Current A	Q.max L/min	H.max m	Suct.max m		
CPM-130	0.60	0.40	0.56	2.9	90	22	9	1"	1"
CPM-146	0.75	0.55	0.75	3.8	100	28	9	1"	1"
CPM-158	1.10	0.75	1.00	5.2	110	32	9	1"	1"