

# CPW

## Series Centrifugal Pump

### Operating Conditions

- Liquid temperature up to 60°C
- Ambient temperature up to 40°C
- Total suction lift up to 9m

### Pump

- Pump Body: Cast Iron
- Impeller: Brass
- Mechanical Seal: Carbon / Ceramic / Stainless Steel

### Motor

- Single Phase
- Motor Housing: Aluminium
- Shaft: Carbon Steel / Stainless steel
- Insulation: Class B
- Protection: IP44
- Cooling: External Ventilation




CPW Series pump



CPW Series pump with PS-01 controller  
Available for: CPW 180

# CPW

## Series Centrifugal Pump

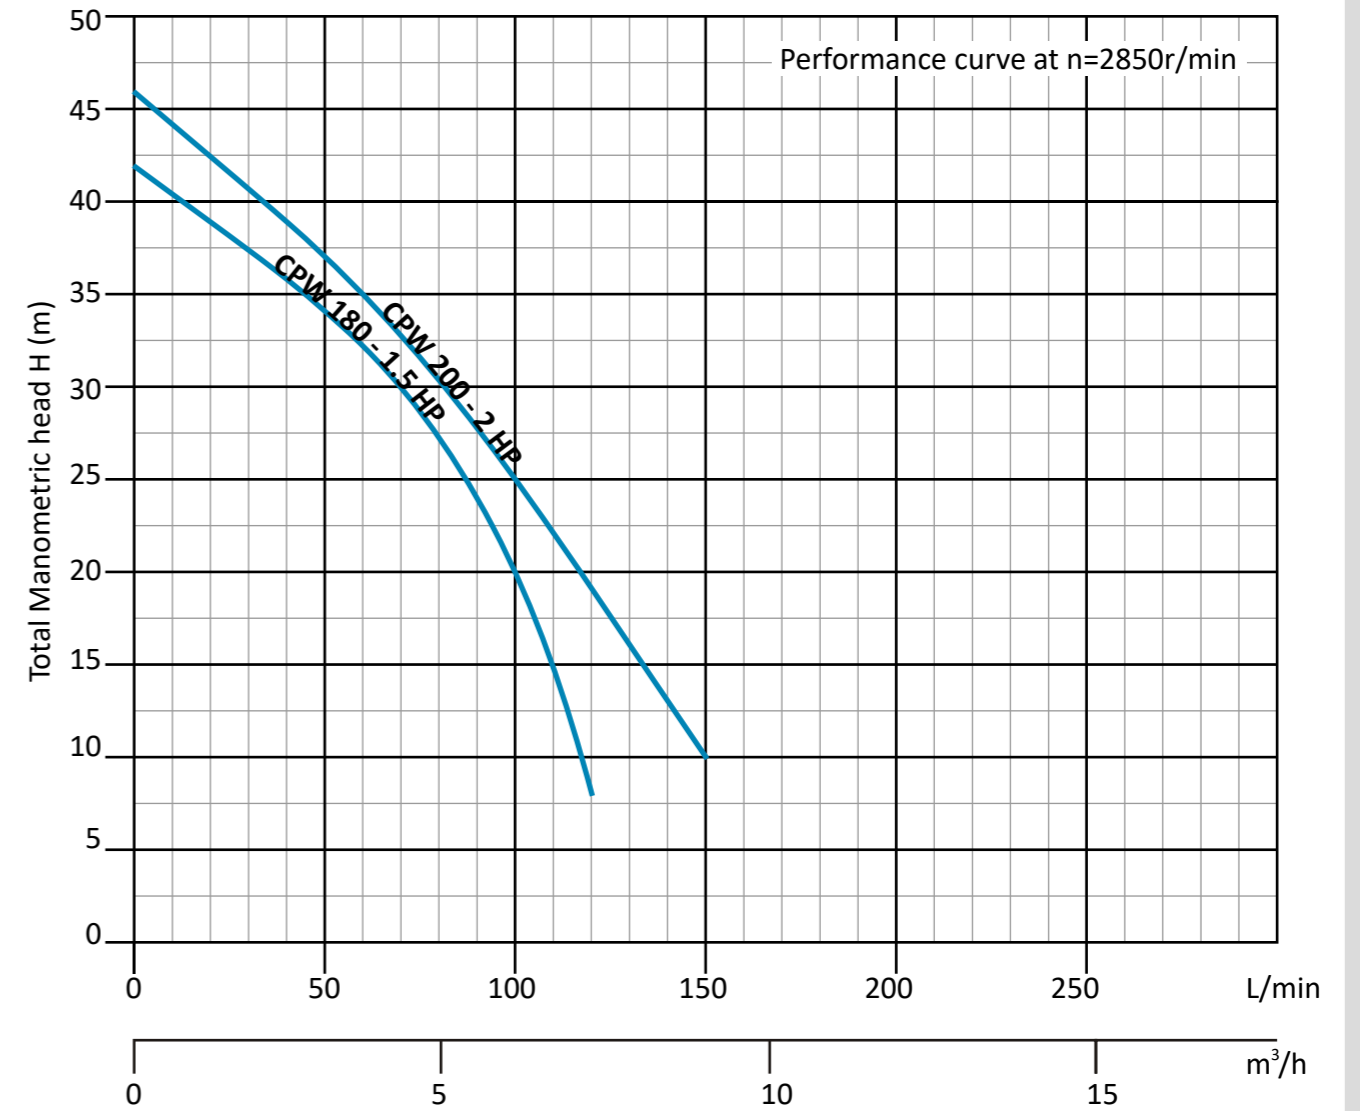

### Technical Data (220~240V/50HZ)

Model	Single-phase Motor				n=2850r/min				
	Input max kW	Output Power		Current A	Q.max L/min	H.max m	Suct.max m	DNA Inch	DNM Inch
		kW	HP						
CPW-180	1.50	1.10	1.50	7.0	120	42	9	1"	1"
CPW-200	2.00	1.50	2.00	9.6	150	46	9	1"	1"