

SCM2

Series Dual Stages Centrifugal Pump

Operating Conditions

- Liquid temperature up to 60°C
- Ambient temperature up to 40°C
- Total suction lift up to 9m

Pump

- Pump Body: Cast Iron
- Impeller: Brass
- Mechanical Seal: Carbon / Ceramic / Stainless Steel

Motor


- Single Phase
- Motor Housing: Aluminium
- Shaft: Carbon Steel / Stainless steel
- Insulation: Class B
- Protection: IP44
- Cooling: External Ventilation



SCM 2 Series Dual Stages Centrifugal Pump

SCM2

Series Dual Stages Centrifugal Pump

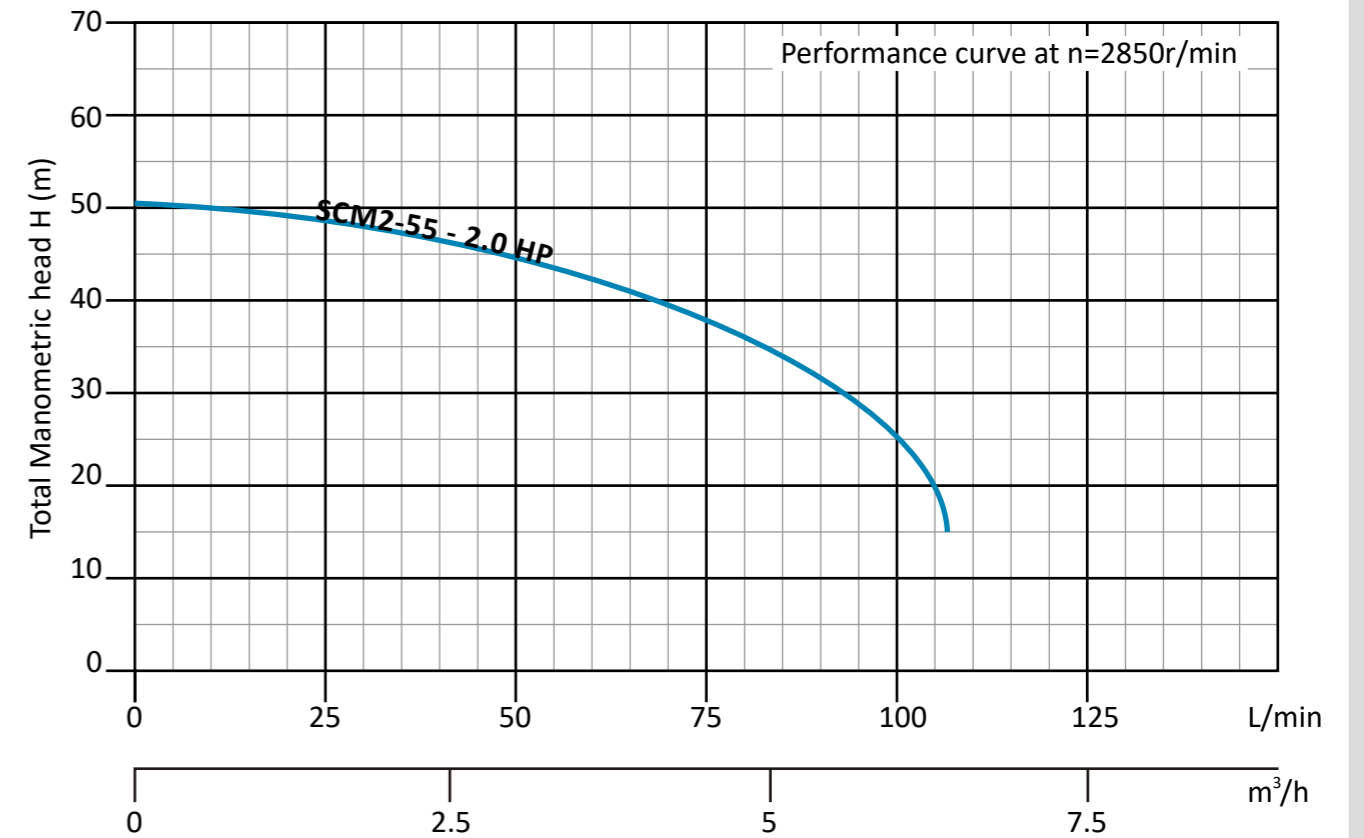

Technical Data (220~240V/50HZ)

Model	Single-phase Motor				n=2850r/min				
	Input max kW	Output Power		Current A	Q.max L/min	H.max m	Suct.max m	DNA Inch	DNM Inch
		kW	HP						
SCM2-55	2.0	1.5	2.0	9.6	105	50	9	1.25"	1"