

CM2-200

Twin-Impeller Pumps

Operating Conditions

- Liquid temperature up to 60°C
- Ambient temperature up to 40°C
- Total suction lift up to 9m

Pump

- Pump Body: Cast Iron
- Impeller: Brass
- Mechanical Seal: Carbon / Ceramic / Stainless Steel


Motor

- Single Phase
- Motor Housing: Aluminium
- Shaft: Welding shaft/Stainless Steel
- Insulation: Class B
- Protection: IP44
- Cooling: External Ventilation



CM2-200 Series
Twin-Impeller Pump

Performance Chart at 2850rpm

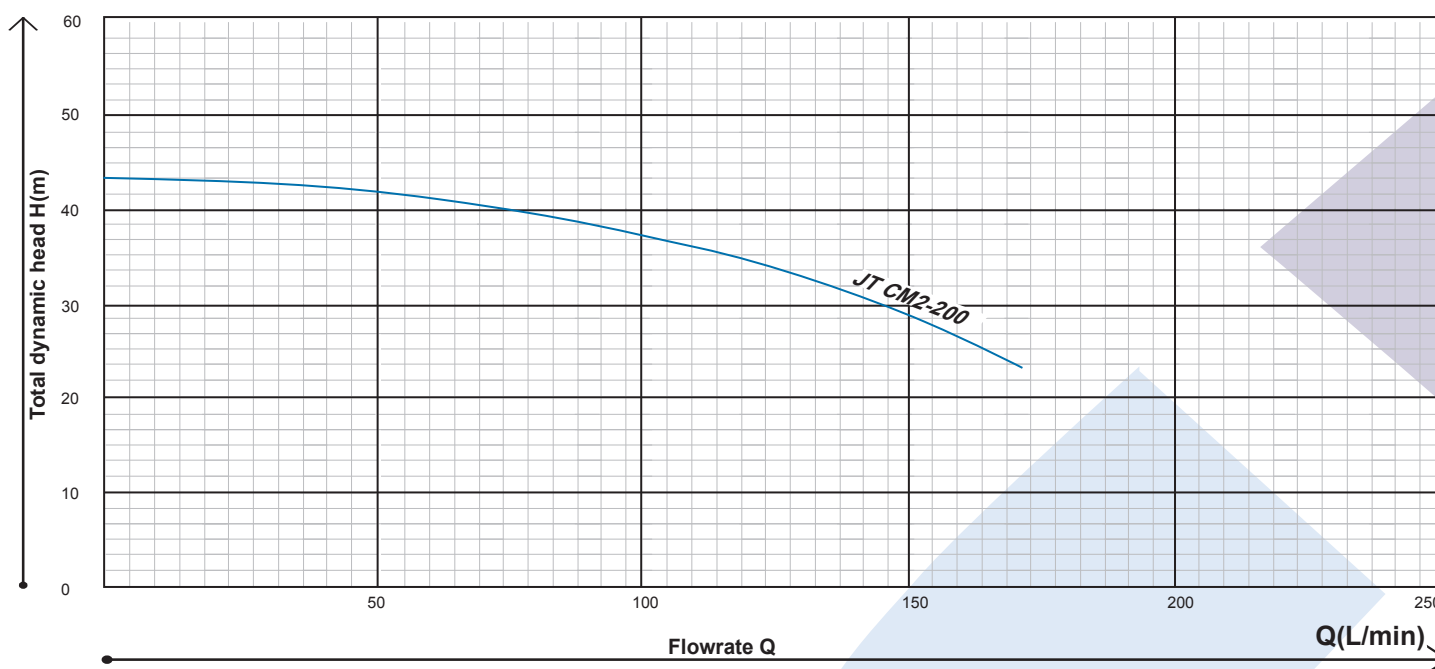

Performance Table

Model	HP	kW	DNA/DNM	Suct.Max m	Q.Max (l/min)	H.Max (m)	Q (l/min)										Dimension (mm)	
							0	20	40	60	80	100	110	120	140	160		
JT CM2-200	3	2.2	1.25"/1"	9	160	43	H(m)	43	42	41	39.5	38	36	34	32	28	24	435x235x285