


Technical Specifications - VSP SN 401 (50HZ)

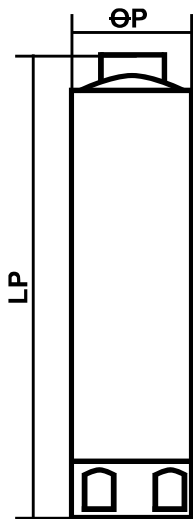

No. of vanes

7

Outlet connection diameter

(inside threaded) 1 1/4"

Pump outside diameter

95mm

Diffuser :Noryl

Impeller :Noryl

Coupling :Stainless steel (AISI 304)

Strainer :Stainless steel (AISI 304)

Valve cap :Stainless steel (AISI 304)

Wear box :Stainless steel (AISI 304)

Capacity

0,3 - 1,5 m³/h

Delivery head

275 - 53 mt

Shaft diameter

(hexagonal) 11mm

Top Diffuser :Noryl

Pump shaft :Stainless steel (AISI 304)

Suction case :Stainless steel (AISI 304)

Top bracket :Stainless steel (AISI 304)

Rotation :CCW

Revolution :2.900 rpm

Dimension and Performance Table

Type	Stages	Motor			Pump			m ³ /h	0	0.3	0.6	0.9	1.2	1.5
		Type	kW	HP	L(m)	DN (RPT/NPT)	Kg							
VSP SN 401 / 10	10	4"	0.37	0.50	324	1.25"	3.3	Head(m)	60	55	46	38	26	11
VSP SN 401 / 13	13	4"	0.37	0.50	377	1.25"	3.7		78	72	62	50	38	14
VSP SN 401 / 19	19	4"	0.55	0.75	481	1.25"	4.7		118	108	95	79	58	21
VSP SN 401 / 26	26	4"	0.75	1.00	642	1.25"	5.8		161	147	130	107	74	28
VSP SN 401 / 38	38	4"	1.10	1.50	864	1.25"	8.2		235	215	188	156	103	41
VSP SN 401 / 49	49	4"	1.50	2.00	1052	1.25"	10.5		325	302	268	219	151	68

