


Technical Specifications - VSP SN 408 (50HZ)

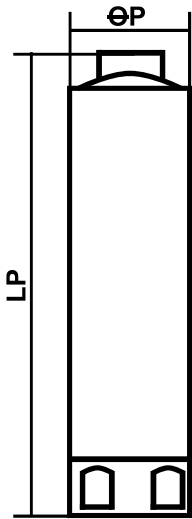

No. of vanes

7

Outlet connection diameter

(inside threaded) 2"

Pump outside diameter

95mm

Diffuser :Noryl

Impeller :Noryl

Coupling :Stainless steel (AISI 304)

Strainer :Stainless steel (AISI 304)

Valve cap :Stainless steel (AISI 304)

Wear box :Stainless steel (AISI 304)

Capacity

7,2 - 12,0 m³/h

Delivery head

171 - 45 mt

Shaft diameter

(hexagonal) 11mm

Top Diffuser :Noryl

Pump shaft :Stainless steel (AISI 304)

Suction case :Stainless steel (AISI 304)

Top bracket :Stainless steel (AISI 304)

Rotation :CCW

Revolution :2.900 rpm

Dimension and Performance Table

Type	Stages	Motor			Pump			m ³ /h	0	4.8	6	8.4	9.6	10.8	12.0
		Type	kW	HP	L(m)	DN (RPT/NPT)	Kg								
VSP SN 408 / 06	6	4"	1.10	1.50	356	2"	3.4	37	33	31	25	20	15	9	
VSP SN 408 / 08	8	4"	1.50	2.00	418	2"	4.0	50	44	41	34	27	20	12	
VSP SN 408 / 13	13	4"	2.20	3.00	573	2"	5.5	82	71	67	54	43	32	19	
VSP SN 408 / 17	17	4"	3.00	4.00	697	2"	6.6	107	92	88	71	57	42	25	
VSP SN 408 / 23	23	4"	4.00	5.50	921	2"	8.4	144	124	120	96	77	58	35	
VSP SN 408 / 32	32	4"	5.50	7.50	1.238	2"	11.0	200	171	162	132	106	79	45	

