


Technical Specifications - VSP SN 412 (50HZ)

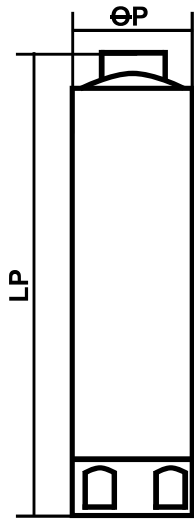

No. of vanes

6

Outlet connection diameter

(inside threaded) 2"

Pump outside diameter

95mm

Diffuser :Noryl

Impeller :Noryl

Coupling :Stainless steel (AISI 304)

Strainer :Stainless steel (AISI 304)

Valve cap :Stainless steel (AISI 304)

Wear box :Stainless steel (AISI 304)

Capacity

9,6 - 15,6 m³/h

Delivery head

136 - 35 mt

Shaft diameter

(hexagonal) 11mm

Top Diffuser :Noryl

Pump shaft :Stainless steel (AISI 304)

Suction case :Stainless steel (AISI 304)

Top bracket :Stainless steel (AISI 304)

Rotation :CCW

Revolution :2.900 rpm

Dimension and Performance Table

Type	Stages	Motor			Pump			m ³ /h	0	9.6	10.8	12	13.2	14.4	15.6
		Type	kW	HP	L(m)	DN (RPT/NPT)	Kg								
VSP SN 412 / 07	7	4"	1.50	2.00	534	2"	5.3	43	27	24	20	15	11	7	
VSP SN 412 / 10	10	4"	2.20	3.00	690	2"	6.7	63	40	35	30	22	17	10	
VSP SN 412 / 14	14	4"	3.00	4.00	989	2"	8.6	87	56	48	41	32	24	15	
VSP SN 412 / 17	17	4"	4.00	5.50	1.092	2"	10.1	108	68	59	51	41	29	18	
VSP SN 412 / 19	19	4"	4.00	5.50	1.195	2"	11.0	120	76	66	56	45	33	20	
VSP SN 412 / 26	26	4"	5.50	7.50	1.559	2"	14.3	163	104	90	77	62	45	27	
VSP SN 412 / 34	34	4"	7.50	10.00	2.049	2"	20.9	213	136	117	100	81	59	35	

