


4SDm2 Performance Curves

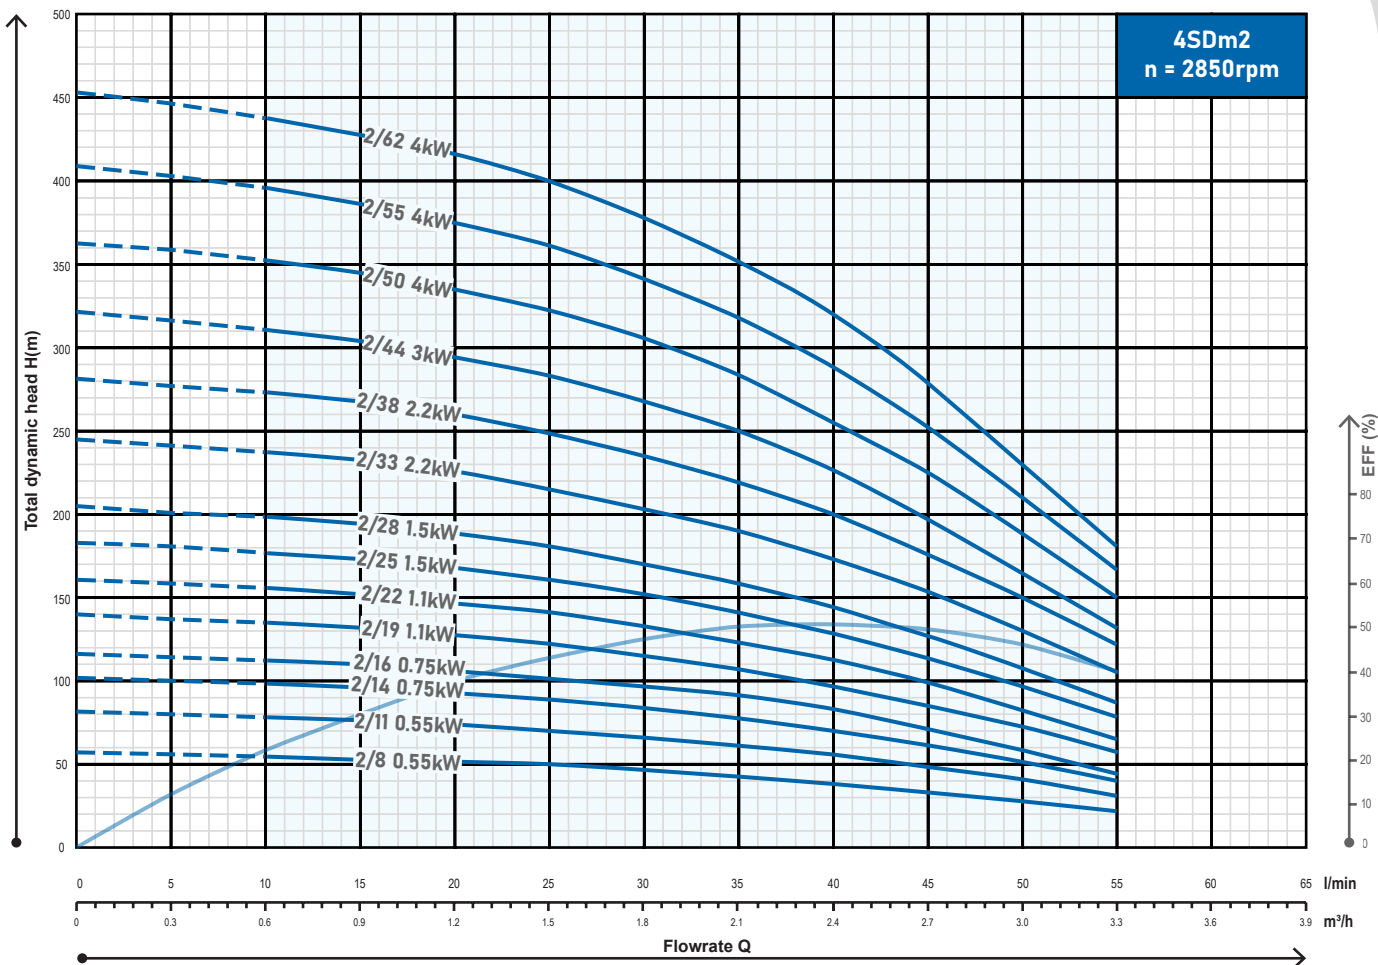

MODEL	POWER		OUTLET SIZE (DN)	Flowrate Q													
	kW	HP		m ³ /h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	3.3	
				l/min	0	5	10	15	20	25	30	35	40	45	50	55	
4SDm 2/8	0.37	0.5	1 1/4" 32mm	HEAD (M)	58	56	55	54	52	50	46	43	38	34	27	21	
4SDm 2/11	0.55	0.75			82	80	79	77	74	71	67	62	56	49	41	32	
4SDm 2/14	0.75	1			102	100	99	97	93	89	84	82	70	62	51	41	
4SDm 2/16	0.75	1			117	114	113	111	106	102	96	94	80	71	58	47	
4SDm 2/19	1.1	1.5			140	137	135	133	127	122	115	107	98	86	71	57	
4SDm 2/22	1.1	1.5			162	159	156	154	147	141	133	124	113	100	82	66	
4SDm 2/25	1.5	2			184	180	178	174	169	162	152	142	128	114	96	78	
4SDm 2/28	1.5	2			206	202	199	195	189	181	170	159	143	128	108	87	
4SDm 2/33	2.2	3			246	241	238	233	226	216	204	191	174	153	130	106	
4SDm 2/38	2.2	3			283	278	274	268	260	249	235	220	200	176	150	122	
4SDm 2/44	3	4			320	317	311	304	295	284	269	250	225	198	165	132	
4SDm 2/50	3	4			364	360	353	345	335	323	306	284	256	225	188	150	
4SDm 2/55	4	5.5			410	403	396	386	376	361	342	318	289	252	206	165	
4SDm 2/62	4	5.5			454	446	438	427	416	400	379	352	320	279	228	183	

4" Pumps